

SACE Tmax XT

FC Cu - Terminali anteriori per cavi in rame XT1-XT2-XT3-XT4

FC Cu - Front terminals for copper cables XT1-XT2-XT3-XT4


FC Cu - Vorderseitige Anschlüsse für Kabel aus Kupfer XT1-XT2-XT3-XT4











FC Cu - Prises avant pour câbles en cuivre XT1-XT2-XT3-XT4

FC Cu - Terminales frontales para cables de cobre XT1-XT2-XT3-XT4


FC Cu - 铜电缆前接线端子XT1-XT2-XT3-XT4

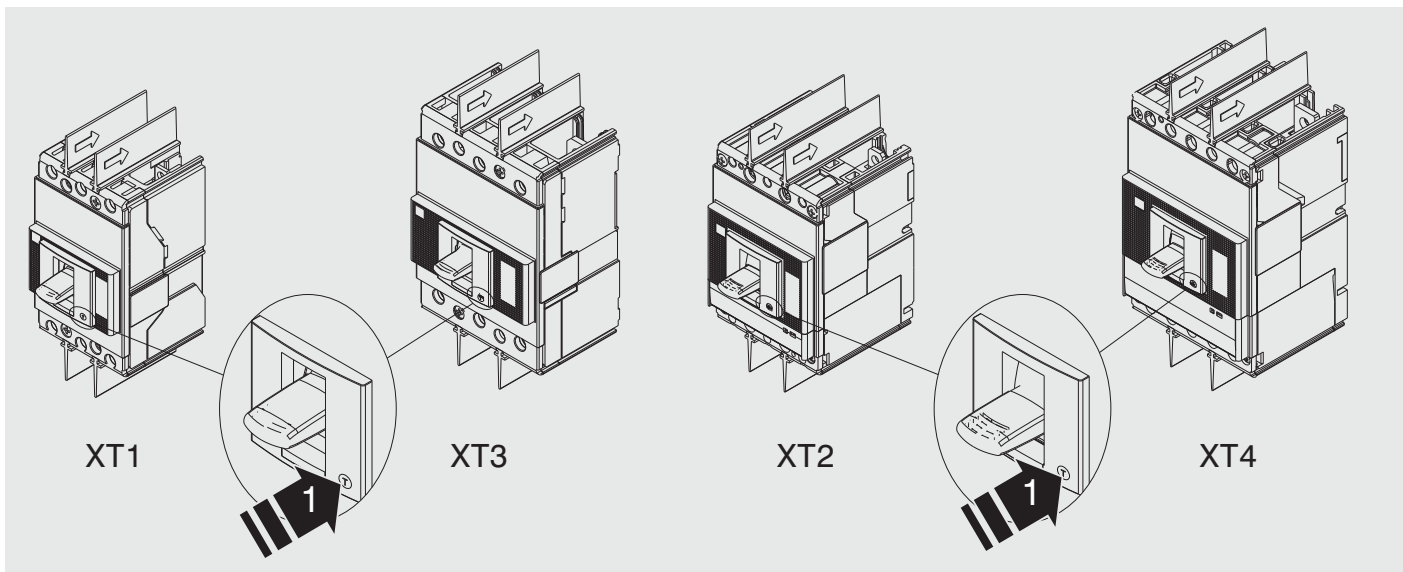XT1-XT2-XT3-XT4




| | | F-P-W | | | | | | | P-W ONLY | | |
|--------------------|-----|---|---|---|---|---|---|---|---|---|---|
| | |  |  |  |  |  |  |  |  |  |  |
| XT1 MCCB | III | / | 3(6) | 3(6) | / | / | / | / | 2(4) | 1(2) | / |
| | IV | / | 4(8) | 4(8) | / | / | / | / | 2(4) | / | 1(2) |
| XT1 MCCB MCP | | III | 3(6) | / | 3(6) | / | / | 3(6) | 3(6) | / | / |
| XT2 | III | / | 3(6) | / | 3(6) | / | / | / | 2(4) | 1(2) | / |
| | IV | / | 4(8) | / | 4(8) | / | / | / | 2(4) | / | 1(2) |
| XT3 | III | / | 3(6) | / | / | 3(6) | / | / | 2(4) | 1(2) | / |
| | IV | / | 4(8) | / | / | 4(8) | / | / | 2(4) | / | 1(2) |
| XT4 | III | / | 3(6) | / | 3(6) | / | / | / | 2(4) | 1(2) | / |
| | IV | / | 4(8) | / | 4(8) | / | / | / | 2(4) | / | 1(2) |

A ONLY FOR XT1 - XT3 F

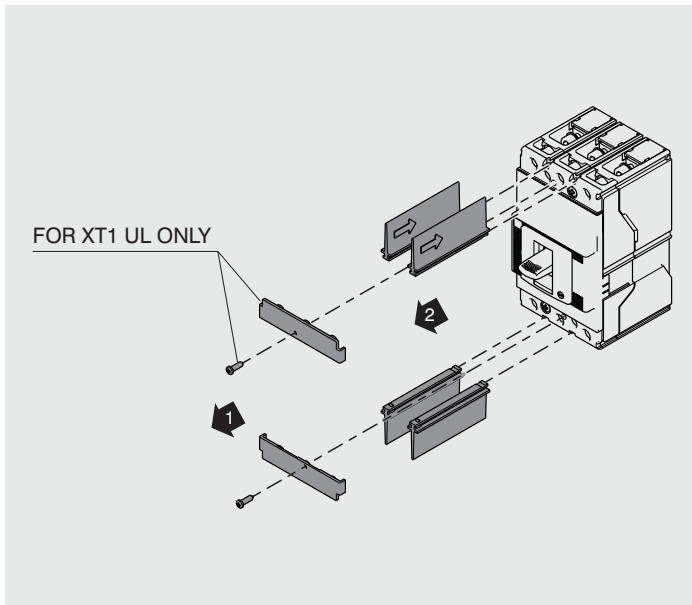

B ONLY FOR XT2 - XT4 F

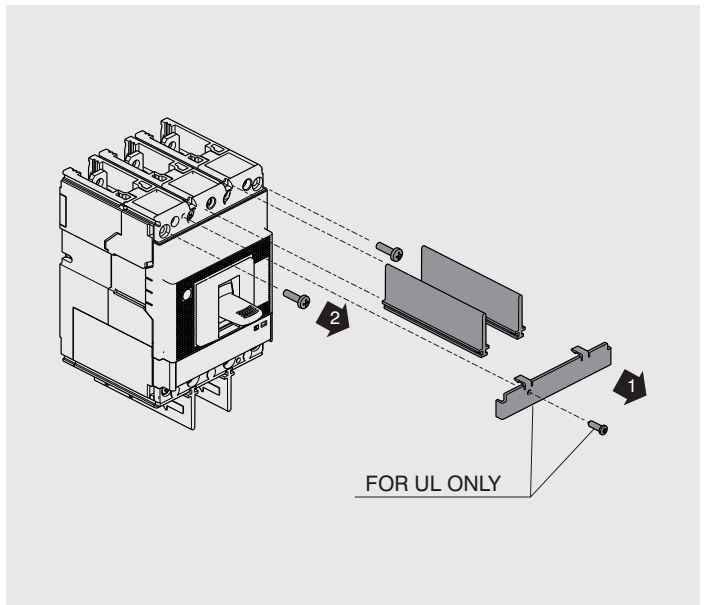

C XT1 MCCB

| | Cu Stranded | Cu Flexible | |
|-----|---------------------|-------------------------|---|
| | | | |
| MAX | 70 mm ² | MAX 50 mm ² | 2,5 mm ² ...70 mm ² = 7 Nm / 62 lb in |
| MIN | 2,5 mm ² | MIN 2,5 mm ² | |
| MAX | 1/0 AWG | 1/0 AWG | 14 AWG...1/0 AWG = 7 Nm / 62 lb in |
| MIN | 14 AWG | 14 AWG | |

D XT1 MCCB - MCP - MA

OK!

NO!

| | Cu Stranded | Cu Flexible | |
|-----|---------------------|-------------------------|---|
| | | | |
| MAX | 70 mm ² | MAX 50 mm ² | 2,5 mm ² ...70 mm ² = 7 Nm / 62 lb in |
| MIN | 1,5 mm ² | MIN 2,5 mm ² | |
| MAX | 1/0 AWG | 1/0 AWG | 14 AWG...1/0 AWG = 7 Nm / 62 lb in |
| MIN | 14 AWG | 14 AWG | |

E


XT2 - XT3 - XT4

| | | Cu Stranded | Cu Flexible | |
|-----|-----|---------------------|-------------------------|--|
| XT2 | MAX | 95 mm ² | MAX 70 mm ² | ≤ 50 mm ² = 7 Nm / 62 lb in |
| | MIN | 1 mm ² | MIN 4 mm ² | > 50 - 95 mm ² = 8,5 Nm / 75 lb in |
| XT3 | MAX | 185 mm ² | MAX 150 mm ² | 6 mm ² ...185 mm ² = 14 Nm / 124 lb in |
| XT4 | MIN | 6 mm ² | MIN 6 mm ² | |
| XT2 | MAX | 1/0 AWG | | 14 AWG...1/0 AWG = 7 Nm / 62 lb in |
| | MIN | 14 AWG | | |
| XT3 | MAX | 250 Kcmil | | 10 AWG...250 Kcmil = 14 Nm / 124 lb in |
| XT4 | MIN | 10 AWG | | |

Dimensions: XT2 Ø max 14, Ø max 0.55"; XT3 Ø max 18, Ø max 0.71"; XT4 Ø max 18, Ø max 0.71"

F

XT1 - XT2 - XT3 - XT4 F

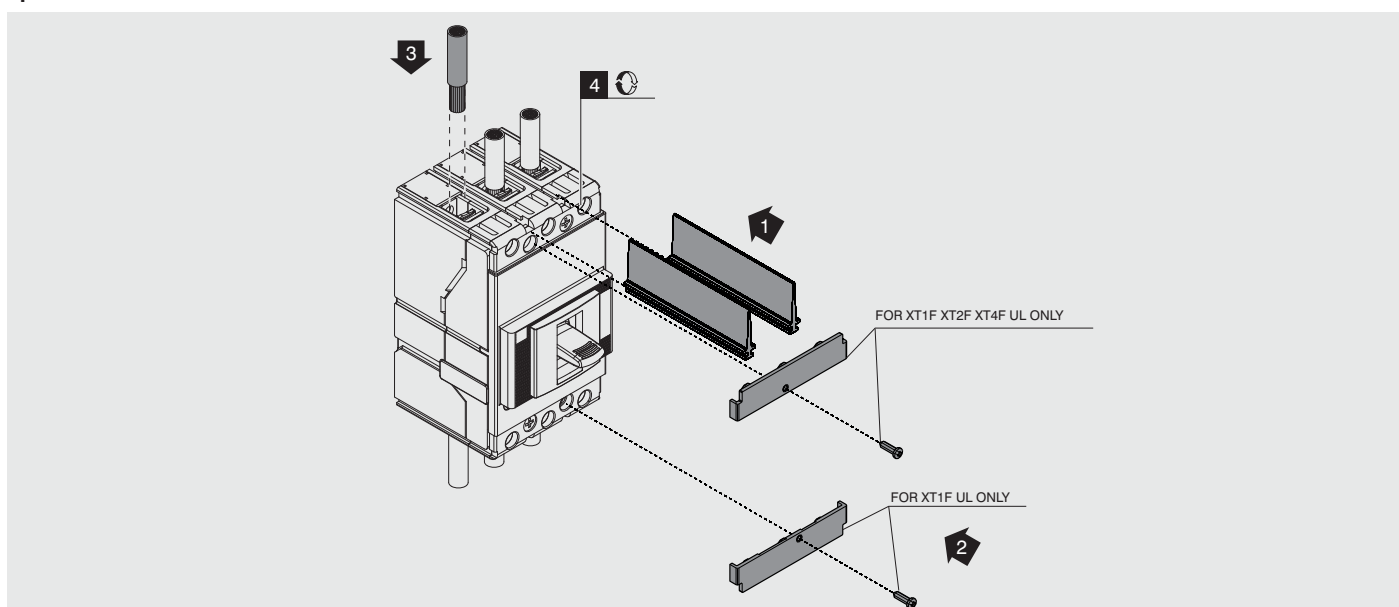


G

XT1 - XT2 - XT3 - XT4 P-W

Only XT2 UL Listed

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo

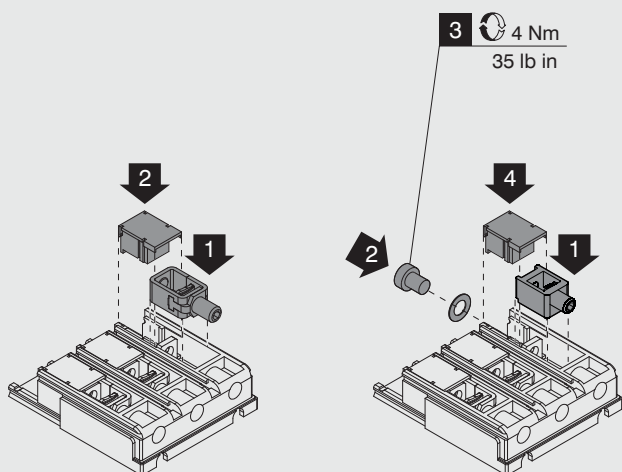


MCCB

MCCB - MCP

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo


Only XT2 UL Listed

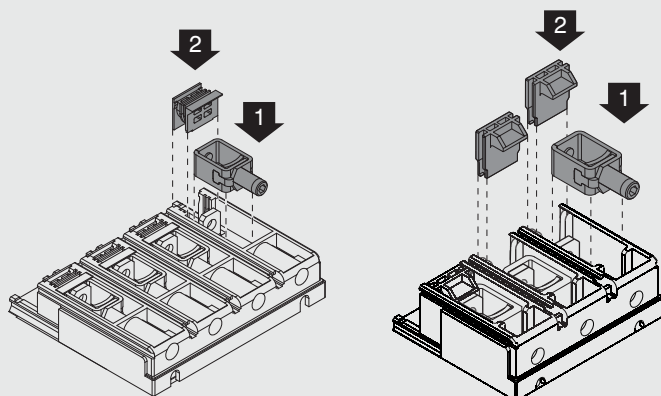

XT2 - XT4

XT3

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo

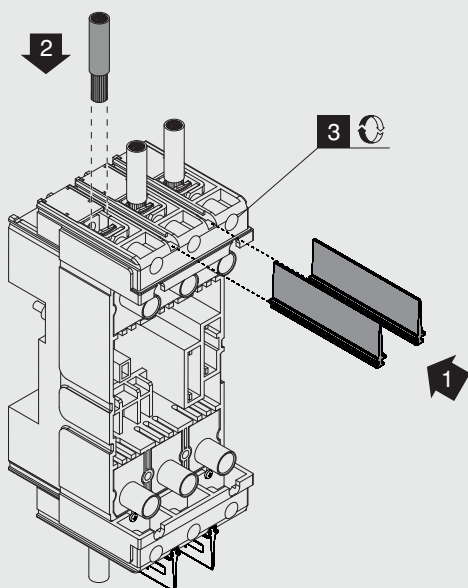

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo